

# City of El Paso - City Plan Commission Staff Report

Case No: SUSC13-00001 Montecillo Unit Five

**Application Type:** Major Preliminary **CPC Hearing Date:** April 4, 2013

**Staff Planner:** Nathaniel Baker, (915) 541-4192, bakernt@elpasotexas.gov

**Location:** East of Mesa Street and north of Argonaut Drive

Acreage: 16.6 acres

**Rep District:** 1

Existing Use:UndevelopedExisting Zoning:SCZ (SmartCode)Proposed Zoning:SCZ (SmartCode)

**Nearest Park:** Galatzan Park (1 mile)

**Nearest School:** Morehead Elementary (0.75 mile)

Park Fees Required: N/A Impact Fee Area: N/A

**Property Owner:** EPT Montecillo Development East, L.P.

**Applicant:** Conde Inc. **Representative:** Conde Inc.

#### SURROUNDING ZONING AND LAND USE

North: SCZ (SmartCode) / Vacant

South: C-1/c (Commercial/condition) / Commercial developments

East: A-2 (Apartments) / Apartment complex

West: GMU (General Mixed Use) / Apartments and commercial

PLAN EL PASO DESIGNATION: G2 Traditional Neighborhood (Walkable)

### **APPLICATION DESCRIPTION**

The applicant proposes to subdivide 16.6 acres for a development containing 5 mixed-use developable lots and land to be dedicated as parkland. Access is proposed off of Mesa Street and Montecillo Boulevard. This application is being reviewed under the SmartCode and is required to comply with the adopted Montecillo regulating plan.

#### **DEVELOPMENT COORDINATING COMMITTEE**

The Development Coordinating Committee recommends **pending** of Montecillo Unit Five in order to review compliance with the SmartCode regulating plan:

### **Planning Division Recommendation**

Planning recommends **pending** in order to review compliance with the SmartCode regulating plan.

#### **Long Range Planning Division**

- 1. This plat is currently designated an "Interim" plat by inclusion of the note specified in §21.10.040(E). As an interim plat, if approved by the CPC, no City permits, to include grading permits may be pulled. If the intention is to pull permits of any kind following plat approval, then the note may be removed and the plat may be reviewed by the CPC subject to the administrative approval of a Preliminary Building Scale Plan (see §21.10.040(D)).
- 2. Lot widths for all lots, except the lot labeled as Lot 1, Block 10 on the Preliminary Building Scale Plan, are in excess of the 180 foot max. permitted by §21.80 Table 15D and 15E.
- 3. Cross-Section being shown for Montecillo Blvd. is CS 60-38, which does not match the cross-section shown in the approved Regulating Plan (i.e. ST 42-32). Additionally, it is not a pre-approved thoroughfare in the SmartCode and cannot be built from Tables 3A, 3B, 4A, and 4B included in §21.80. As a result, staff does not have the discretion to approve the proposed CS 60-38. As a possible solution, CS 60-34 is a pre-approved cross-section and is very similar to the proposed CS 60-38 (see §21.80 Table 4C); as a pre-approved cross-section, the Regulating Plan may be administratively adjusted to replace ST 42-32 with CS 60-34 (see §21.10.050(D)).
- 4. Comments regarding the Preliminary Building Scale Plan submitted in conjunction with this plat have been submitted to the applicant/representative.

### **City Development Department - Land Development**

We have reviewed subject plan recommend **Approval**; Developer/Engineer needs to address the following comments:

No Objection.

- 1 .All developed storm water runoff must be retained within the subdivision boundaries.
- 2. TXDOT approval is required for access and drainage on Mesa Street.
- 3. Clarify Flood Zone designation.

**EPWU Storm Utility Comments:** 

#### Montecillo Unit 5 – Revised Major Preliminary

- 1. The developer shall be responsible for maintenance of all offsite stormwater management facilities unless drainage easements or rights-of-way with adequate access are provided for the EPWU Stormwater Utility. Both proposed Detention Basins and a portion of storm sewer pipe are not within subdivision limits.
- 2. EPWU recommends using principles of low impact development (such as recessed landscaping, rainwater harvesting, and porous pavements) to reduce the amount of developed stormwater runoff.

#### **Parks and Recreation Department**

We have reviewed **Montecillo Unit 5**, a major preliminary plat map which is zoned "SCZ"

(Smart Code Zoning) therefore, not required to comply with the parkland dedication ordinance Title 19 – Subdivision & Development Plats, **Chapter 19.20 - Parks & Open Space**, however, applicant needs to comply with Title 21 (Smart Code Zoning) requirements and provide the following comments:

### Comments for approval of the "Plat"

- 1. Clarify the purpose / intent of creating two lots (Lot 1, Block 11 & Lot 2, Block 11) with-in the same area noted as "Park / Open Space" and with the same Transect Zone (T-1) designation.
- 2. Clarify if the Commercial Streets (CS 55-29), The Frontage Roads (CS 51-32 & CS 48-24) and the Frontage Road w / Bus Stop (CS 45-35) as shown on the Montecillo Development Regulating Plan Thoroughfare Assignment Plan need to be reflected on this plat.
- 3. Per site visit observations (see photos), concrete flumes, drainage structures and surface flow storm water run-off is coming from the King Hills Apartments (southeast property) and running thru the "Park / Open Space" area; clarify if drainage easements are to be proposed / required.
- 4. Parks Department recommends for the area labeled as "Park / Open Space" area (Lot 2, Block 11) be labeled as Stormwater Open Space.
- 5. Clarify ownership / purpose of the 10' R.O.W. & Easement (Vol. 366, Pg. 883) located within the "Park / Open Space" area south of the King Hills Apartments, and clarify if to remain or be vacated by this plat.

## **Comments for approval of Subdivision Improvement Plans**

- 1. Manmade sloped / disturbed areas with-in the "Park / Open Space" area (Lot 2, Block 11) shall be re-vegetated with desert plants complete with drip / irrigation system.
- 2. All areas with-in the "Park / Open Space" area (Lot 2, Block 11) shall be cleaned and free of trash.
- 3. Developer / Engineer shall be responsible for mitigating the storm water run-off, erosion, and unstable slopes with-in the "Park / Open Space" area (Lot 2, Block 11).
- 4. During grading, Developer shall be responsible for salvaging as much Cactus barrels as possible as well as full grown Yuccas and replanted as necessary with-in any areas meant to be left natural and undisturbed.

This Development is with-in Park Zone: **NW-2** 

Nearest Parks: Galatzan & Crestmont

### **El Paso Water Utilities**

1. EPWU does not object to this request.

#### Water:

2. Water service for the subject property is available from an existing 12-inch diameter water main along Argonaut Drive. This water main operates in the Mission Hills pressure zone and can provide service up to elevation 4272 ft. (PSB Datum).

- 3. Water main extensions are required along the proposed extensions of Montecillo Boulevard and Cuartel Lane.
- 4. Private water pressure regulating devices will be required at the discharge side the water meter. The Developer shall include in the sale of contract documents that the lot/home buyer shall acquire ownership of the above-described water pressure regulating devices to be located at the discharge side of the water meters. The lot/home buyer shall be responsible for the operation and maintenance of the above-described water pressure regulating devices.

#### Sewer:

- 5. There is an existing 8-inch diameter sewer main along Montecillo Boulevard that dead-ends at the eastern right-of-way line of Mesa Street. Due to the topography of the subdivision, sewer main extensions within dedicated easements are anticipated.
- 6. EPWU requires a new service application to serve the subject property. New service applications are available at 1154 Hawkins, 3<sup>rd</sup> Floor. The following items are required at the time of application: (1) hard copy of subdivision plat with street names and addresses; (2) finalized set of street improvement plans, including storm sewer; (3) digital copy of subdivision plat; (4) benchmark check; and (5) construction schedule. Service will be provided in accordance with the current EPWU PSB Rules and Regulations. The owner is responsible for the costs of any necessary on-site and off-site extensions, relocations or adjustments of water and sanitary sewer lines and appurtenances.

#### **Sun Metro**

No comments received.

#### **El Paso Fire Department**

No comments received.

#### <u>911</u>

No comments received.

### **Central Appraisal District**

No comments received.

### El Paso Electric Company

No comments received.

#### **Texas Gas Company**

No comments received.

#### **School District**

No comments received.


#### **Additional Requirements and General Comments:**


- 1. Submit to the City Development Department Planning Division the following prior to recording of the subdivision.
  - a. Current certified tax certificate(s)
  - b. Current proof of ownership
  - c. Release of access document, if applicable


- d. Set of restrictive covenants, if applicable
- 2. Every subdivision shall provide for postal delivery service. The subdivider shall coordinate the installation and construction with the United States Postal Service in determining the type of delivery service for the proposed subdivision. In all cases, the type and location of delivery service shall be subject to the approval of the United States Postal Service.

#### **Attachments**

- 1. Location map
- 2. Aerial map
- 3. Preliminary Plat
- 4. Application

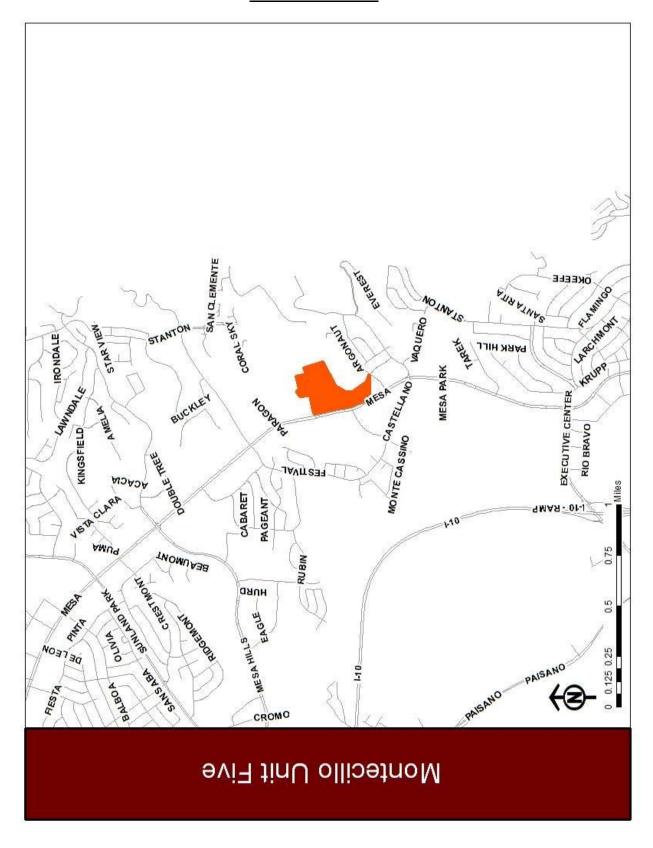

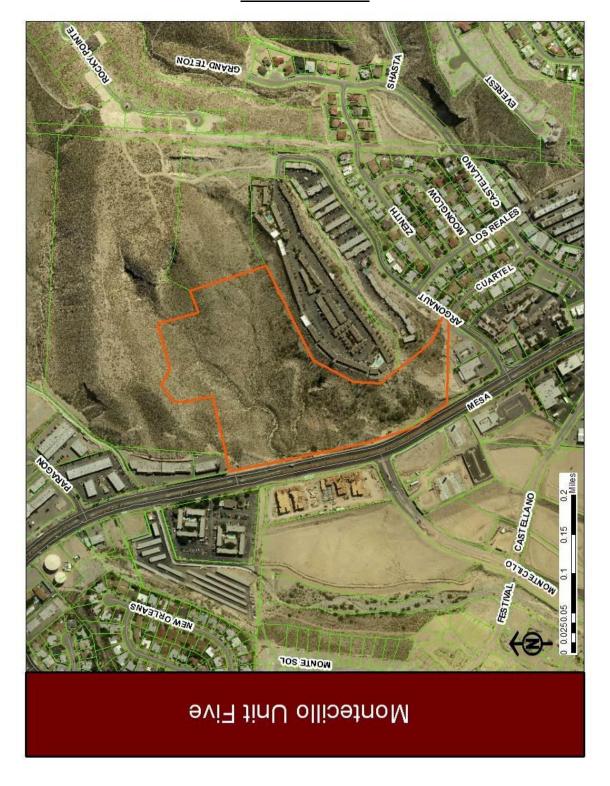

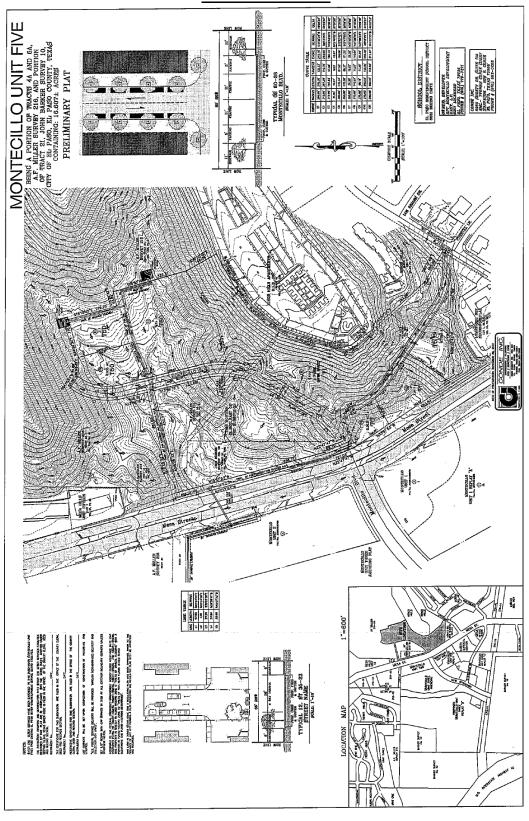





### CITY PLAN COMMISSION APPLICATION FOR MAJOR SUBDIVISION PRELIMINARY APPROVAL (Revised)

DATE: March 18, 201	3	_	File No. SUSC 13-00001.			
SUBDIVISION NAME:	Montecillo Unit	Five				
Legal Description for the are Being a Portion of Tract ( 10. City of El Paso, El Pa Proposed Land Uses:	A and all of Trac	ct 4A, A. F. Mille	Grant, etc.) r Survey 216, and all c	of Tract 21, John Barke	or Survey	
Single-family Duplex Apartment Mobile Home P.U.D. Park School Commercial Industrial	ACRES	SITES	Office Street & Alley Ponding & Drainage Institutional Other (specify below) Mixed Uses  Total No. Sites 8 al Acres (Gross) 16.60	6.759	SITES  1 1 5	
What is existing zoning of the Will the residential sites, as properties and the work of t	roposed, permit de	velopment in full c	ompliance with all zoning Overhead	Combination of Bo	sting residential	
Are special public improvements a modification or exception If answer to is "Yes", please	ents proposed in co	nnection with the o	levelopment? Yesdinance proposed? Yes	X No		
Remarks and/or explanation of	-					
Improvement Plans submitt	ed?	Yes	NoX			
Will the proposed subdivision effective date of the current ap	require the city to oplicable standards	review and decide ? Yes	whether this application _NoX	is subject to the standards		

12.	Owner of record EPT Montecillo Development East, L.P. 8201 Lockheed, El Paso, 7	TX 79925	779-7271
	(Name & Address)	(Zip)	(Phone)
13.	Developer EPT Montecillo Development East, L.P. 8201 Lockheed, El Paso, TX (Name & Address)	79925	779-7271
	(Marie & Addiess)	(Zip)	(Phone)
14.	Engineer CONDE INC. 6080 Surety Drive, Ste 100, El Paso, TX	79905	915-592-0283
	(Name & Address)	(Zip)	(Phone)

CASHIER'S VALIDATION

FEE: \$

EPT Montecillo Development East, L.P. A Texas Limited Liability Company By It's General Partner EPT Montecillo Development Management, LLC A Texas Limited Liability Company

OWNER SIGNATURE:

RJchard Aguilar Manager

REPRESENTATIVE:

NOTE: SUBMITTAL OF AN APPLICATION DOES NOT CONSTITUTE ACCEPTANCE FOR PROCESSING UNTIL THE PLANNING DEPARTMENT REVIEWS THE APPLICATION FOR ACCURACY AND COMPLETENESS